

VL19 (IP67)

- *19 wide x 9 high*
- *Remote driver*
- *Surface mounted*
- *Standard finish Anodised Aluminium*
- *5/10 watts/m or 20 watts/m*
- *Solid PCB*
- *High clarity resin*
- *3K, 4k CRI80+*
- *Pre-mount extrusion*
- *RGB optional*
- *Manufactured in module lengths up to 1995mm*
- *End feed entry*
- *All photometric data provided in absolute lumens*



VL19 (IP67)

	VOLTAGE	WATTAGE
VL19-5/10	DC24V	5W/10W/m (selectable)
VL19-20	DC24V	20W/m

VL19 IP67 - SURFACE MOUNT (19w x 11.5h)

VL19 IP67 - 3000/4000K (5W / 10w per metre selectable)




VL19 IP67 - 3000/4000K (20w per metre)



VL19 PROFILE:

19mm wide x 9mm high



INCLUSIONS :

Full length Mounting Base

Solid PCB

Clear Fill Optical Resin

1 Metre Cable

ABSOLUTE LUMENS PER METRE

VL26: 26mm W x 11mm H




VL36: 36mm W x 30mm H




VL36R: 46mm W x 30mm H




VL70: 70mm W x 75mm H



VL70R: 87mm W x 75mm H



VL70UD: 70mm W x 114mm H

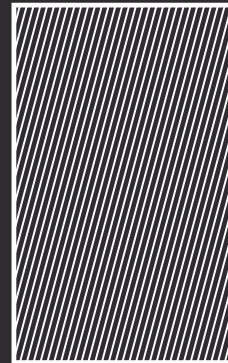

VL11 IP67: 11mm W x 21mm H

(Extrusion Option 14mm W x 26mm H)



VL16 IP67: 16mm W x 16mm H

(Extrusion Option 19mm W x 24mm H)



VL19: 19mm W x 9mm H



VL24: 54mm W x 17mm H



MODEL	WATTAGE	ABSOLUTE LUMENS	
		3000K	4000K
VL26	7W	642	694
VL26	14W	1121	1256
VL36 / R	14W	1124	1222
VL36 / R	28W	2053	2204
VL70 / R / UD	17W	1454	1602
VL70 / R / UD	24W	2090	2304
VL70 / R / UD	32W	2750	3031
VL11	10W	627	703
VL16	10W	756	847
VL19	5W	436	476
VL19	10W	822	904
VL19	20W	1514	1633
VL24	10W	740	814

All data is per metre
LEDvision diffuser (VL26 - 36 - 70)